Product data sheet

TV-FM extended broadband outlet, terminated outlet

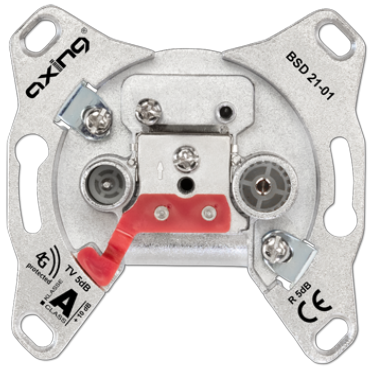

Reference number
BSD 21-01

TV-FM extended broadband outlet, terminated outlet

- CATV / SAT
- Suitable for broadband return channel

Terminated outlets are used to terminate stub lines coming from the tap/splitter (broadband network) or multiswitch/LNB (star structure).

Covers:
AS / A ranges: ref.-no.: A 561 PLTV ..
CD range: ref.-no.: CD 561 SAT ..
LS range: ref.-no.: ..990 TV ..
50 x 50: ref.-no.: 161 TV

Technical data

Shielding effectiveness according to EN 50083-2:	class A (+10 dB)
Tap method:	splitter
Trunk	
Frequency range, input:	5 ... 2200 MHz
Isolation, internal:	≥ 15 dB
Diameter inner conductor:	0.63 ... 1.13 mm
Outer diameter cable:	4.7 ... 7.35 mm
TV connection	
Connection type:	IEC male
Frequency range:	5 ... 2200 MHz
Connection attenuation:	5 dB ±1.5 dB
DC power pass to trunk:	yes
Radio connection	
Connection type:	IEC female
Frequency range:	5 ... 2200 MHz
Connection attenuation:	5 dB ±1.5 dB
Dimensions (W x H x D):	68 x 68 x 35 mm

ALBRECHT JUNG GMBH & CO. KG
Volmestraße 1
58579 Schalksmühle

Telefon +49 (0) 23 55/80 60
Telefax +49 (0) 23 55/80 6189
E-Mail kundencenter@jung.de